
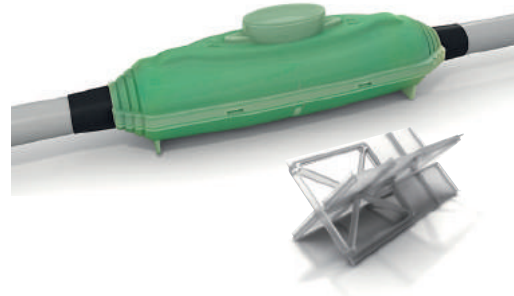
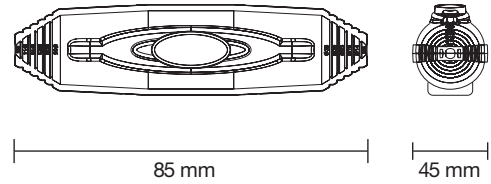




SIZE  
0

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 - 90 °C
- Shelf life: 3 years
- Available with solid state polyurethane resin 

Cable diameter (min - max): 8 - 26 mm



# SKA0

Cast resin joint for straight connections  
phase separator included



code SKA0

## Applications

- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead





## Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

## Kit contents

- Two transparent polypropylene shell halves
- Modular phaseseparator
- Bag with two-component solid state resin
- Insulating tape
- Instructions

APPLICATION TABLE

Number of cores	Cable diameter Ø (mm)	Conductor cross section (mm <sup>2</sup> )	
		min	max
	8 - 26	2.5	35
		1.5	10
			
			

Cross sections measured using FG7 flexible cables