






SIZE
3

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 to 90 °C
- Shelf life: 3 years
- Available with:
 - Solid state polyurethane resin 
 - Re-enterable polybutadiene resin 

Cable diameter (min- max): 20 - 54 mm

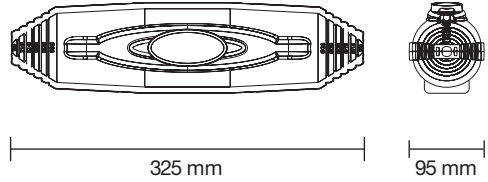

SKA3

Cast resin joint for straight connections
phase separator included



code SKA3



code SKA3R

Applications

- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead





Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

Kit contents

- Two transparent polypropylene shell halves
- Modular phaseseparator
- Bag with two-component solid state resin
- **Direct Injection casting system (DICS)**
- Insulating tape
- Latex protective gloves
- Instructions

APPLICATION TABLE

number of conductors	Cable diameter Ø (mm)	Conductor cross section (mm ²)	
		min	max
	20 - 54	95	400
		25	120
		25	95
			

Cross sections measured using FG7 flexible cables