
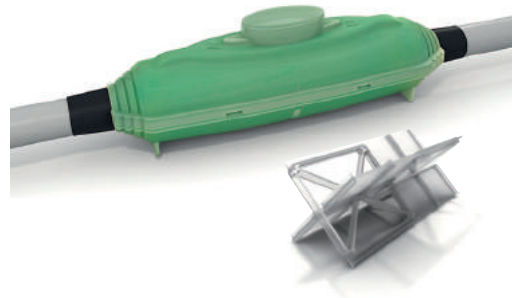
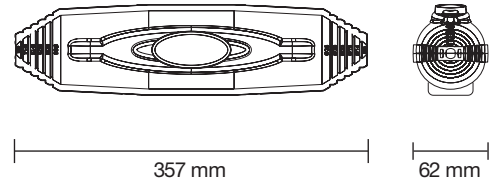


- Complies with the standard for low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 to 90 °C
- Shelf life: 3 years
- Available with solid state polyurethane resin 

Cable diameter (min - max): 23 - 35 mm



SKA3S

Cast resin joint for straight connections
phase separator included



code **SKA3S**

Applications

- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead





Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

Kit contents

- Two transparent polypropylene shell halves
- Modular phase separator
- Bag with two-component solid state resin
- **Direct Injection casting system (DICS)**
- Insulating tape
- Latex protective gloves
- Instructions

APPLICATION TABLE

number of conductors	Cable diameter Ø (mm)	Conductor cross section (mm ²)	
		min	max
	23 - 35	50	185
		25	50
			
			

Cross sections measured using FG7 flexible cables