




SIZE
5

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 to 90 °C
- Shelf life: 3 years
- Available with:
 - Solid state polyurethane resin
 - Re-enterable polybutadiene resin

Cable diameter (min- max): 45 - 73 mm

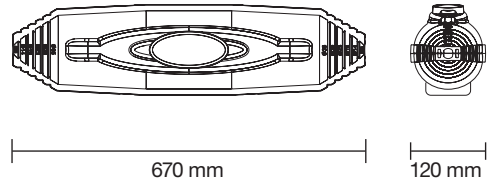

SKA5

Cast resin joint for straight connections
phase separator included

code SKA5
 code SKA5R

Applications

- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead

Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

Kit contents

- Two transparent polypropylene shell halves
- Modular phase separator
- Bag with two-component solid state resin
- **Direct Injection casting system (DICS)**
- Insulating tape
- Latex protective gloves
- Instructions

APPLICATION TABLE			
number of conductors	Cable diameter Ø (mm)	Conductor cross section (mm ²)	
		min	max
	45 - 73	400	630
		150	300

Cross sections measured using FG7 flexible cables