



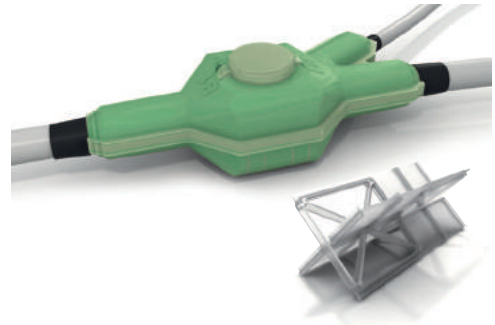

SIZE  
**4**

- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 to 90 °C
- Shelf life: 3 years
- Available with:
  - Solid state polyurethane resin
  - Re-enterable polybutadiene resin

Diameter of main cable (min - max): 35 - 51 mm  
 Diameter of branch cable (min - max): 17 - 33 mm

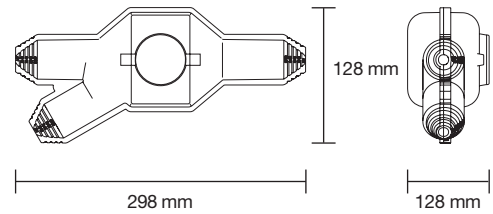

# SKB4

**Cast resin joint for Y branch connections**  
 phase separator included



**code SKB4**  
**code SKB4R**

### Applications

- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead

### Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

### Kit contents

- Two transparent polypropylene shell halves
- Modular phaseseparator
- Bag with two-component solid state resin
- **Direct Injection casting system (DICS)**
- Insulating tape
- Latex protective gloves
- Instructions

APPLICATION TABLE								
number of conductors	Cable diameter Ø (mm)		Conductor cross section (mm²)					
	main	branch	min		max			
			main cable	branch cable	main cable	branch cable		
			300	300	500	400		
	35 - 51	17 - 33	50	50	240	50		
					150	50		
					50	25	120	50

Cross sections measured using FG7 flexible cables