

HX-6S

(Exclusively for use at 50 Hz or 60 Hz)

Helmet fitting type

AC 6.6kV

Hot line proximity alarm exclusively for overhead line works

* Please designate the frequency (50 Hz or 60 Hz).

[Attention]


This is not suitable for cubicle works.

Specifications

Model	HX-6S	
Location of use	Exclusive for work with overhead lines	
Alarm starting distance (Under standard condition)	110cm	
Frequency	Either 50 Hz or 60 Hz, whichever is designated	
Sound volume	65dB or more (1m apart)	
Battery	CR2025 or CR2032(3V) × 1 pcs	
Battery life (with new battery)	Continuously operating state	About 50 hr.
	Unused state	About 2 years
Operating temperature range	-5°C ~ +45°C	



HX-6/HX-6S Operation Voltage-distance table and graph

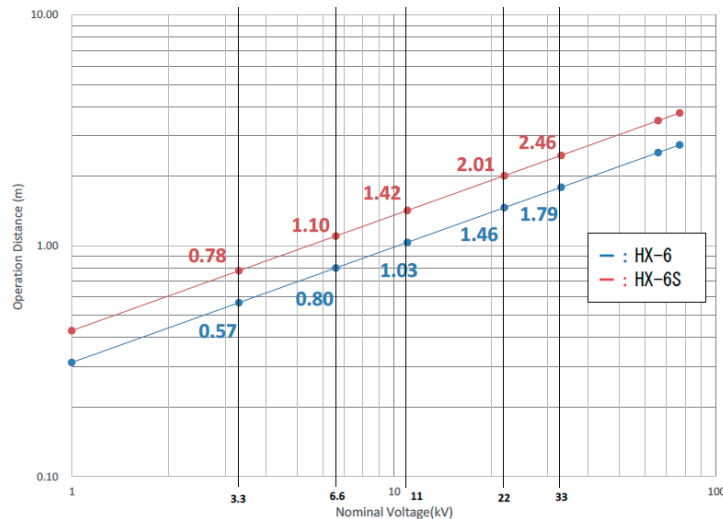

Operation Voltage Distance graph (Theoretical value)

Operation Voltage Distance Table (Theoretical value)

Normal Voltage	Operation Distance	
	HX-6	HX-6S
6.6kV	0.8m	1.1m
11kV	1.0m	1.4m
22kV	1.5m	2.0m
33kV	1.8m	2.5m

Operation Voltage-distance table and graph are theoretical value.

Operation distance is varied depending on the actual surrounding environment.

Please confirm operation distance in actual use environment before using.