

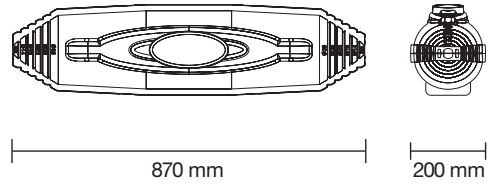


- Complies with the standard for 0.6/1 kV low voltage joints (CEI EN 50393)
- Protection level: equivalent to IPX8 (EN 60529)
- Operating temperature: -20 to 90 °C
- Shelf life: 3 years
- Available with:
 - Solid state polyurethane resin 
 - Re-enterable polybutadiene resin 

Cable diameter (min- max): 55 - 80 mm



SKA6

Cast resin joint for straight connections
phase separator included



code SKA6
code SKA6R

Applications



- Single core cables
- Multicore cables up to 4 cores
- Installation underground, overhead

Advantages

- Excellent insulating properties
- Watertight joint seal
- Excellent corrosion protection
- Excellent mechanical strength

Kit contents

- Two transparent polypropylene shell halves
- Modular phase **separator**
- Bag with two-component solid state resin
- **Direct Injection casting system** (DICS)
- Insulating tape
- Latex protective gloves
- Instructions

APPLICATION TABLE			
number of conductors	Cable diameter Ø (mm)	Conductor cross section (mm ²)	
		min	max
	55 - 80	185	400
			

Cross sections measured using FG7 flexible cables